

(2) HRUシリーズ

(a) 能力一覧表


単位 kW(50/60Hz)

形 式	吸 入 圧 力 飽 和 温 度 (°C)											
	-45	-40	-35	-30	-25	-20	-17	-15	-10	-5	0	5
HRU22A-L	1.38/1.65	1.70/2.04	2.12/2.55	2.63/3.15	3.25/3.9	3.95/4.7	4.40/5.3	4.47/5.7	5.6/6.7	6.7/7.9	7.8/9.3	9.1/10.8
HRU30A-L	1.7/2.02	2.15/2.58	2.75/3.3	3.45/4.1	4.2/5.0	5.1/6.1	5.7/6.8	6.1/7.3	7.1/8.5	8.4/10.0	9.7/11.5	11.1/13.3
HRU37A-L	2.24/2.66	2.85/3.4	3.6/4.3	4.45/5.3	5.4/6.5	6.6/7.9	7.4/8.7	8.0/9.5	9.5/11.2	11.1/13.2	12.8/15.3	14.7/17.6
HRU45A-L	2.4/2.95	3.1/3.7	4.0/4.8	5.1/6.0	6.2/7.4	7.5/9.0	8.4/10.0	9.0/10.7	10.6/12.5	12.6/14.8	14.8/17.4	17.3/20.5
HRU55A-L	3.3/4.0	4.05/5.0	5.3/6.4	6.7/8.1	8.3/9.9	10.1/11.9	11.3/13.3	12.1/14.3	14.5/17.0	17.2/20.2	20.0/23.6	23.0/27.1


注(1) 凝縮器吸込空気温度32°C

(b) 能力表


HRU22A-L

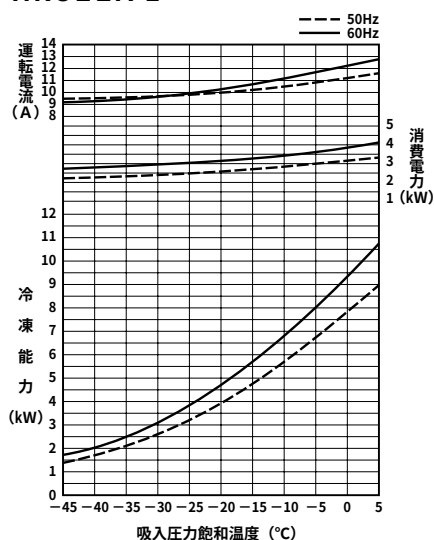


HRU30A-L

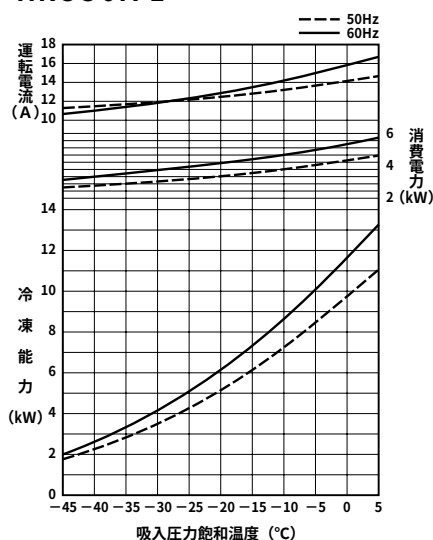

HRU37A-L

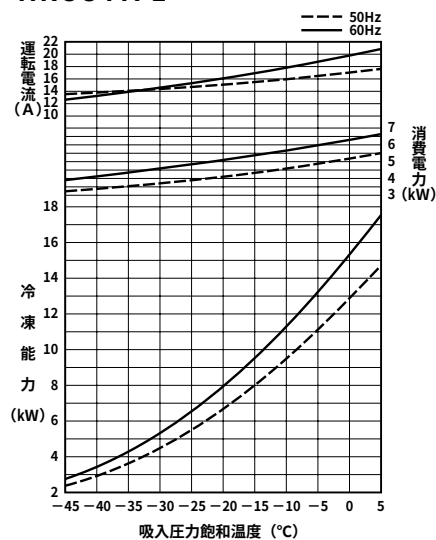

HRU45A-L

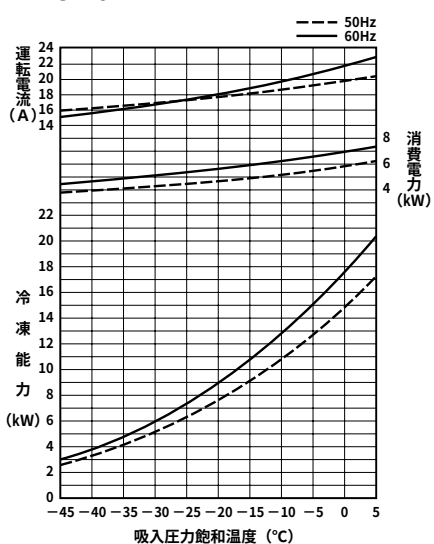

HRU55A-L

