

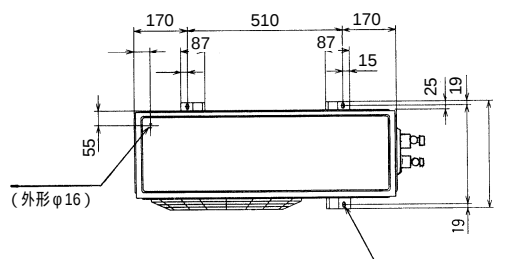
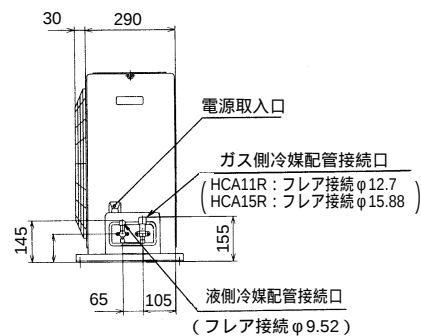





HCA11R , 15R

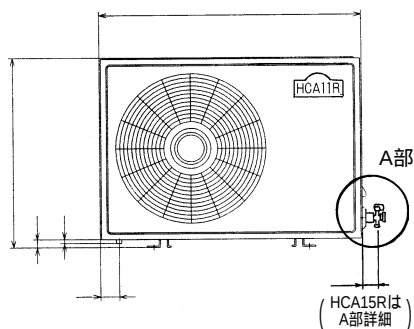

A部詳細
(HCA15R)



HCA22R

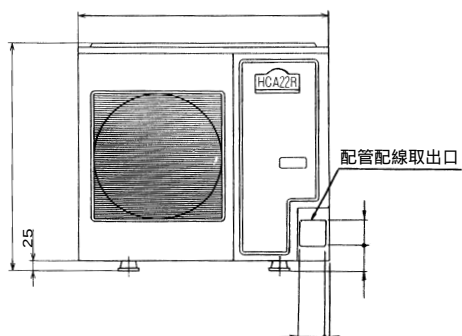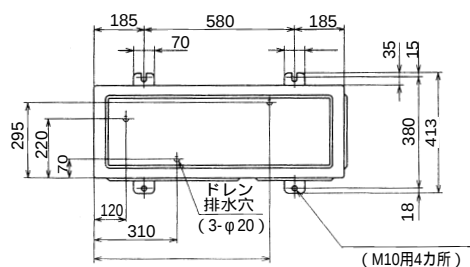

1.1.4 能力表

(1) 能力一覧表

単位 W (kcal/h) (50/60Hz)

形 式	吸 入 圧 力 飽 和 温 度 ()									
	- 40	- 35	- 30	- 25	- 20	- 15	- 10	- 5	0	5
HCA06R	280/350 (240/300)	360/470 (310/400)	470/590 (400/510)	600/760 (520/650)	780/940 (670/810)	950/1160 (820/1000)	1200/1430 (1030/1230)	1470/1730 (1260/1490)	1760/2060 (1510/1770)	2080/2420 (1790/2080)
HCA08R	410/520 (350/450)	520/640 (450/550)	700/870 (600/750)	930/1100 (800/950)	1160/1400 (1000/1200)	1400/1740 (1200/1500)	1630/2030 (1400/1750)	1920/2380 (1650/2050)	2210/2730 (1900/2350)	2500/3080 (2150/2650)
HCA11R	760/870 (650/750)	870/1050 (750/900)	1100/1340 (950/1150)	1400/1740 (1200/1500)	1740/2150 (1500/1850)	2150/2620 (1850/2250)	2560/3200 (2200/2750)	3080/3720 (2650/3200)	3600/4300 (3100/3700)	4130/4940 (3550/4250)
HCA15R	990/1160 (850/1000)	1160/1400 (1000/1200)	1450/1800 (1250/1550)	1740/2270 (1500/1950)	2270/2790 (1950/2400)	2760/3370 (2370/2900)	3310/4010 (2850/3450)	3900/4710 (3350/4050)	4480/5470 (3850/4700)	5120/6280 (4400/5400)
HCA22R	1400/1630 (1200/1400)	1630/1980 (1400/1700)	1980/2440 (1700/2100)	2330/2910 (2000/2500)	2790/3490 (2400/3000)	3490/4300 (3000/3700)	4300/5350 (3700/4600)	5230/6400 (4500/5500)	6160/7560 (5300/6500)	7210/8720 (6200/7500)